

ERSKINE[®]
ATTACHMENTS LLC

www.erskineattachments.com
800.437.6912

EXTREME HEAVY-DUTY BRUSH MOWER

SKID STEER ATTACHMENT



**THE ULTIMATE
MOWING MACHINE...**

Extreme jobs call for the Extreme Heavy-Duty Brush Mower. This mower is armored to withstand the toughest conditions. The push bar and open front design work to feed material into the mower where it is quickly shredded by four 5/8" thick blades.

FEATURES

- Deck has a boxed cross-section in a horseshoe shape that acts as the backbone of the deck.
- 4 posts on the bottom of the deck help protect bearing carrier from wires
- Funneled open front design
- 1/4" thick grade 50 steel deck material
- Push Bar: heavy-duty 2x3 construction welded to the deck
- Radial piston motor for maximum efficiency
- Covered motor for safety
- Large in-deck storage compartment
- Tapered and armored design
- Our universal attachment plates fit most skid steers

800.437.6912

ERSKINE[®]
ATTACHMENTS LLC

ERSKINE[®]
ATTACHMENTS LLC

www.erskineattachments.com
800.437.6912

EXTREME HEAVY-DUTY BRUSH MOWER

SKID STEER ATTACHMENT

2" X 3" TUBULAR STEEL
HEAVY-DUTY PUSH BAR

HEAVY-DUTY RADIAL
PISTON MOTOR

PROTECTIVE
MOTOR COVER

HOSE BUNGEE

SERRATED
SAFETY STEPS

HOSE PROTECTOR

(4) 5/8" THICK
HEAVY-DUTY REVERSIBLE
SWING-AWAY BLADES

AR400 HEAVY-DUTY
SKID SHOES

PUSH BAR
END CAPS

PUSH BAR
TIE-DOWN POINTS

LARGE IN-DECK STORAGE
COMPARTMENT

SERRATED
SAFETY STEPS

1/4" THICK GRADE 50
STEEL DECK

FUNNELED OPEN
FRONT DESIGN

16 SQUARE CARBIDE
TIPPED STAGGERED
TEETH

800.437.6912

ERSKINE[®]
ATTACHMENTS LLC

ERSKINE[®]
ATTACHMENTS LLC

www.erskineattachments.com

800.437.6912

EXTREME HEAVY-DUTY BRUSH MOWER**SKID STEER ATTACHMENT**

Model	72" (25.0-31.9 gpm)	72" (32.0-45.0 gpm)
Part Number	901358	901359
Overall Height	36"	36"
Overall Length	85"	85"
Overall Width	78.9"	78.9"
Cutting Width	72"	72"
Deck Thickness/Material	1/4" Grade 50 Steel	1/4" Grade 50 Steel
Skid Shoe Thickness/Material	1/2" AR400 Steel	1/2" AR400 Steel
Output Shaft Diameter	3.25"	3.25"
Operating Weight w/ Blade Carrier	2,300 lb.	2,300 lb.
Flow Rates	25 - 45 GPM High Flow Only	25-45 GPM High Flow Only
Tip Speed	15,700 ft/min @ 30 GPM	15,500 ft/min @ 40 GPM
Operating Pressure	3,000 - 4,200 psi	3,000 - 4,200 psi
Storage Compartment Dimensions	39.8" Wide x 18.8" Long x 9" Deep	39.8" Wide x 18.8" Long x 9" Deep
Blades	(4) 5/8" x 6" x 15.75" Straight Blades	(4) 5/8" x 6" x 15.75" Straight Blades
Blade Material	AR400	AR400
Blade Carrier Weight	697 lb.	697 lb.
Stump Grinder Teeth	(16) 3/4" Carbide Tipped	(16) 3/4" Carbide Tipped
Cutting Capacity	10" Soft Wood	10" Soft Wood

Options		
Factory Installed Couplers (Bobcat only)	Optional	Optional
Factory Installed High Flow Couplers	Optional	Optional



800.437.6912

ERSKINE[®]
ATTACHMENTS LLC



Heavy-Duty Radial Piston Motor

High starting torque and extremely efficient, high quality and American made. The motor is rated to withstand pressure spikes to 6000 psi. The motors have up to 95% mechanical efficiency. Piston layout greatly increases low speed torque which decreased recover time. The motor rotor ring is coated with a proprietary substance that allows for higher speeds and less friction. The piston seals are made from Teflon which is more tolerant of contamination than standard piston rings. The motor also has an integral anti-cavitation valve to prevent motor damage during shutdown. It also has dual port relief valves for shutdown braking and clipping pressure spikes.



Funneled Open Front Design

The deck funnels material to the cutting blades and blade carrier.



16 Square Carbide Tipped Staggered Teeth

Tough, long lasting and can grind stumps, cleaner and finer finish.




Blade Carrier

This blade carrier creates less drag, which allows it to retain it's energy for the next impact, making it more efficient in cutting trees. Our 700 lb. blade carrier is made of grade 80 and grade 50 steel. Unique almost 2" thick sandwiched plate design. The design affords great strength without the excessive weight of a solid design. The swing-away blades reduce the shock loads on the support bearings which extends the life of the mower.



Boxed Cross-Section Backbone

Deck has a boxed cross-section in a horseshoe shape that acts as the backbone of the deck.

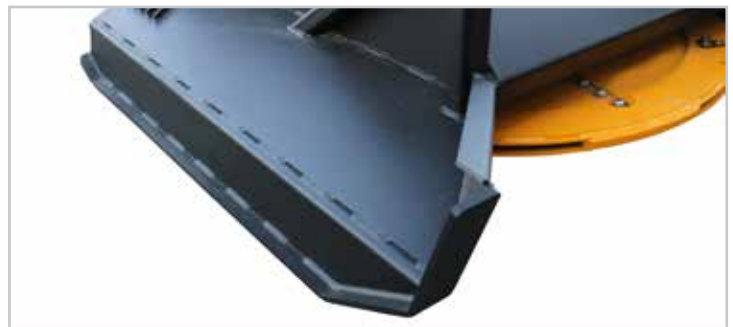

1/4" Thick Grade 50 Steel Deck

Gives extreme strength to protect from the large forces encountered. Clean deck design reduces amount of debris buildup and is easy to clean off. Deck has a boxed cross-section in a horseshoe shape that acts as the backbone of the deck.

800.437.6912

ERSKINE[®]
ATTACHMENTS LLC



(4) 5/8" Thick Heavy-Duty Reversible Swing-Away Blades

Protects blades from damage when blades impact with unmovable objects. Our blade design is integrated into the carrier and acts as a hatchet effect allowing the blades to cut larger trees. This blade design is less likely to bend or break.



Serrated Safety Steps

Serrated steps ensure positive traction for safety.



Hose Protector

It helps prevent hoses from snagging on tree branches.



Hose Bungee

Bungee strap helps secure the hoses.



Protective Motor Cover

Protects the radial piston motor from debris and falling objects.



Serrated Safety Steps

Serrated steps ensure positive traction for safety.

800.437.6912

ERSKINE
ATTACHMENTS LLC




Manual Holder

Storage compartment to store maintenance supplies and tools.



Large In-Deck Storage Compartment

Storage compartment to store maintenance supplies and tools.

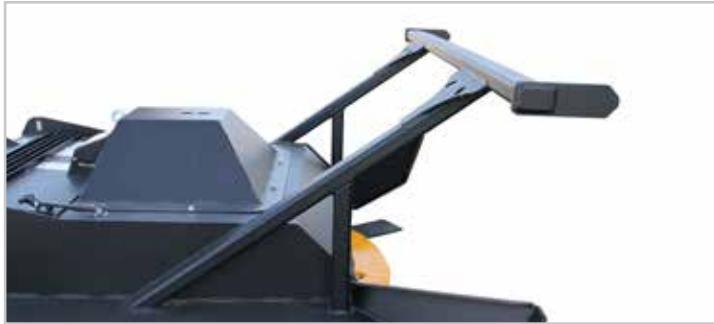

2"x3" Tubular Steel Heavy-Duty Push Bar

Push bar is made of rectangular tube steel for strength in all directions. Reinforced welded joints are stronger than bolted joints.



Push Bar End Caps

Push bar end caps capture and hold material in front of the mower so it doesn't slip off the side. This increases productivity.



Push Bar Tie-Down Points

The push bar has tie-down points that can be used for securing the load on a trailer.



AR400 Heavy-Duty Skid Shoes

Our AR400 heavy-duty skid shoes are highly wear resistant and very strong.

800.437.6912

ERSKINE
ATTACHMENTS LLC