

ERSKINE[®]
ATTACHMENTS LLC

www.erskineattachments.com
800.437.6912

PAVEMENT SAW

SKID STEER ATTACHMENT

MAKE IT WORK...

The Pavement Saw is a cost effective alternative to a more cumbersome self-propelled saw unit.



With its powerful planetary/motor combination, the 9" cutter wheel depth is ideal for cutting patches, expansion joints and pavement cuts for utility and traffic loops. Planetary drive motor and tungsten carbide teeth eat through asphalt and hard surfaces with ease. The patented electro-hydraulic side shift enables the to cut close to walls, curbs and other fixed objects.

FEATURES

- Adaptable to all skid steer loaders with high flow hydraulic capacity and replaces more cumbersome self-propelled saw units
- 9" cutting depth is ideal for cutting patches and expansion joints and making pavement cuts for utility lines and traffic loops
- Electro-hydraulic side-shift enables the saw to cut close to walls, curbs and fixed objects
- Built-in shroud retracts as cutting depth increases
- Recommended operating flow and pressure is 27-42 gpm, at 2,250-5,000 psi. Wheel speed at 30 gpm is 100 rpm
- Our universal attachment plates fit most skid steers

800.437.6912

ERSKINE[®]
ATTACHMENTS LLC

ERSKINE[®]

ATTACHMENTS LLC

www.erskineattachments.com

800.437.6912

PAVEMENT SAW

SKID STEER ATTACHMENT



Model	915PS	925PS	945PS
Part Number	901196	901182	901183
Motor Specifications	2.5"		
Minimum Flow Rate	22 GPM	25 GPM	25 GPM
Maximum Flow Rate	40 GPM	40 GPM	40 GPM
Maximum Speed	180 RPM	180 RPM	180 RPM
Minimum Operating Pressure	2,000 psi	2,200 psi	2,200 psi
Maximum Pressure	5,500 psi	5,500 psi	5,500 psi
Maximum Power Output	60	60	60
Maximum Torque	5,000 ft-lb.	5,000 ft-lb.	5,000 ft-lb.
Saw Specifications	290 lb.		
Hydraulic Flow Classification	High Flow	High Flow	High Flow
Number of Teeth	36	28	28

Options

Pistol Grip Control Harness

Loader Specific Wire Harness

Factory Installed Case Drain Coupler

Factory Installed Couplers

Factory Installed High Flow Couplers

800.437.6912

ERSKINE[®]
ATTACHMENTS LLC

ERSKINE[®]
ATTACHMENTS LLC

www.erskineattachments.com
800.437.6912

PAVEMENT SAW


SKID STEER ATTACHMENT

GUIDE ARM
allows operator to follow
marked path for accurate,
straight cuts

HYDRAULIC DEPTH CONTROL
maintains consistent depth of cut

DURABLE heavy-duty
cast rollers for long life

PLANETARY DRIVE
coupled with high flow hydraulics
generates high torque for cutting tough material

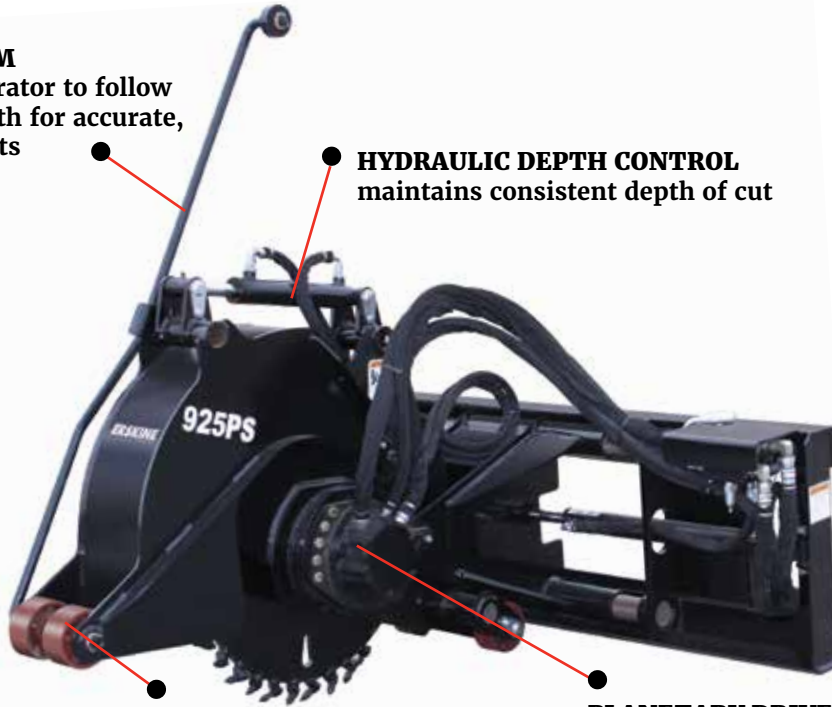

800.437.6912

ERSKINE[®]
ATTACHMENTS LLC